
SCUBAPRO®


Technical Service Reference & Repair Guide

Contents:

Cover	Figure	#1
Main Housing & Swivel Assembly	Figure	#2
Piston & HP Seat Components	Figure	#3
Piston & HP Seat Installation	Figure	#4
3000 psi Yoke Components	Figure	#5
Applying Torque To The 1" Yoke Nut	Figure	#6
Mk 10, Full Cutaway	Figure	#7
Main Spring Shims & S.P.E.C.	Figure	#8
General Procedures & Trouble Shooting	Figure	#9

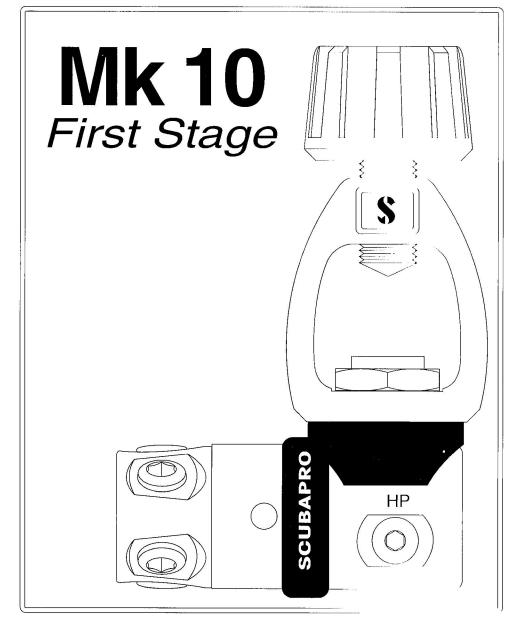

Important Note: The following information "is not" designed to be a complete training guide for infield servicing of the Mark 10 first stage. All Scubapro technicians are required to attend an annual repair clinic to insure safe handling and servicing of Scubapro products.

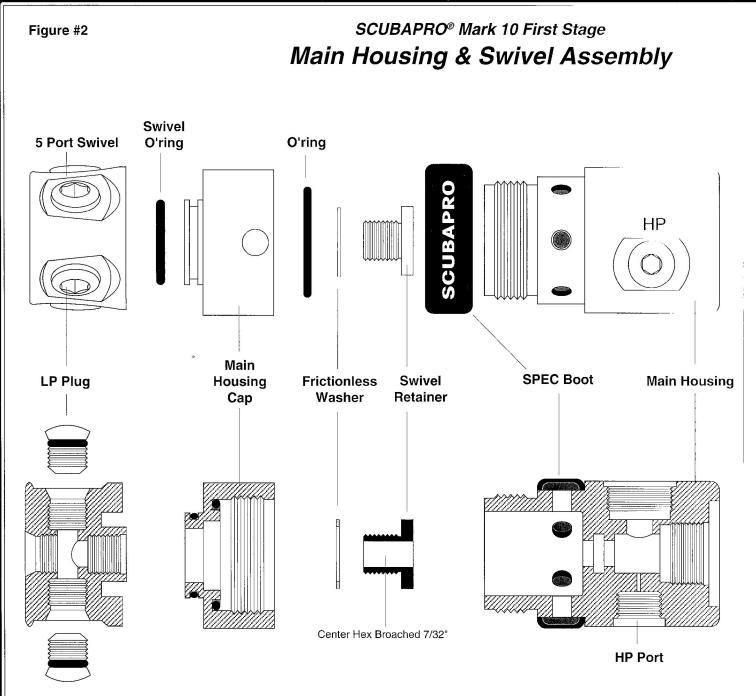

Notes:

The Mark 10 main housing and swivel parts are detailed to the left in both the external and cutaway views. The assembly of the accomponents is reasonably straight forward. Observe the following procedures when doing the final assembly:


- Torque the swivel retainer to 55 70 inchibs via the 7/32" center hex broach
- Replace and lubricate the swivel port o'ring
- Lighten the main housing and mainhousing capusing the multitool. The tension should be secure enough to prevent disassembly by hand.
- The SPLC boot may be installed after the Mark 10 is completely assembled.

Pete Wolfinger, Scubapro Dealer Support

Notes:

The illustration below shows the piston and high pressure seat components. Both the piston head and piston stem o'rings should be replaced and properly lubricated. The HP seat is also always replaced during service. Be sure to stay up-to-date on the latest engineering bulletins regarding current HP seats available as replacement parts.

SCUBAPRO® Mark 10 First Stage Piston & HP Seat Components

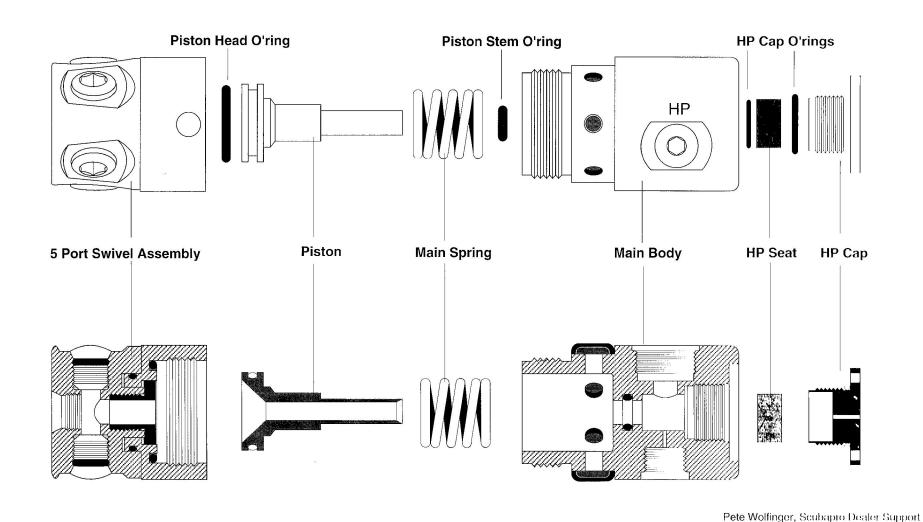

SCUBAPRO® Mark 10 First Stage Piston & Seat Installation

Notes:

Be sure to use a piston bullet when installing the piston into the main housing. The bullet slides into the piston bore and allows the sharp piston knife edge to slide through the internal stem o'ring without damaging the o'ring. The bullet can be removed from the far end of the main body after the piston is in place. After the bullet has been removed, the HP seat assembly can be threaded into the main housing. Tighten the HP cap using the pin spanner on the multi tool (not shown).

Piston Assembly Piston Bullet

HP Seat Removal/Installation

To remove the HP seat from the cap, hold an air blow gun over the small hole in the cap and pressurize. The air will get behind the seat and blow it forward out of the cap. Position your hand over the seat during this operation to catch the seat when it exits the cap. Install a new seat by "hand pressing" the seat into the cap. Be sure that the cone shaped recess is facing out. This recess helps to avoid a sonic whistle caused by high pressure air flowing around the seat and into the piston bore.


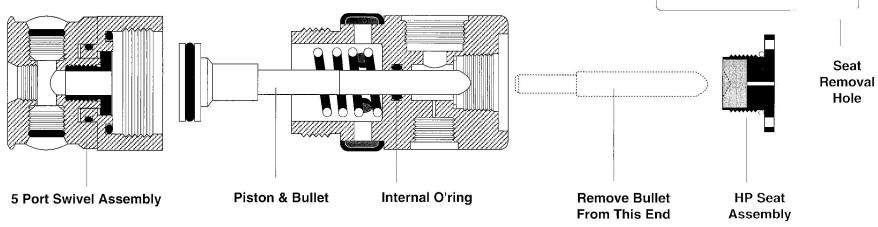


Figure #5 SCUBAPRO® Mark 10 First Stage 3000 PSI Yoke Components Filter Clip Note: Yoke Screw All Scubapro first stages are shipped **Conical Filter** with a 3000 psi yoke system for connecting the first stage to a standard o'ring sealed valve. A Din connecting system is also available. The strength of the yoke has been increased several times over the last 25 years. It is highly recommended that all older yoke systems Yoke Nut 3000 psi Yoke be replaced with the current 3000 psi yoke. This recommendation is based on the availability of 3000 psi air cylinders and the likelihood of the first stage being exposed to this higher pressure. In the interest of safety, please pass this suggestion along to your customers. Saddle Mk 10 Main Assembly The conical filter is not covered in the Scubapro Limited Lifetime Warranty, but it is recommended that it be replaced during annual service. Over a period of time, the tiny air pores in the filter will become plugged and reduce air flow to the first stage. The internal condition of the tank and the presence of other foreign material, such as air filter chemicals blown into the tank during filling, may require replacement of the conical filter at more frequent intervals. The best course is to inform your customer of the tank condition and eliminate the source of the problem.


Pete Wolfinger, Scubapro Dealer Support



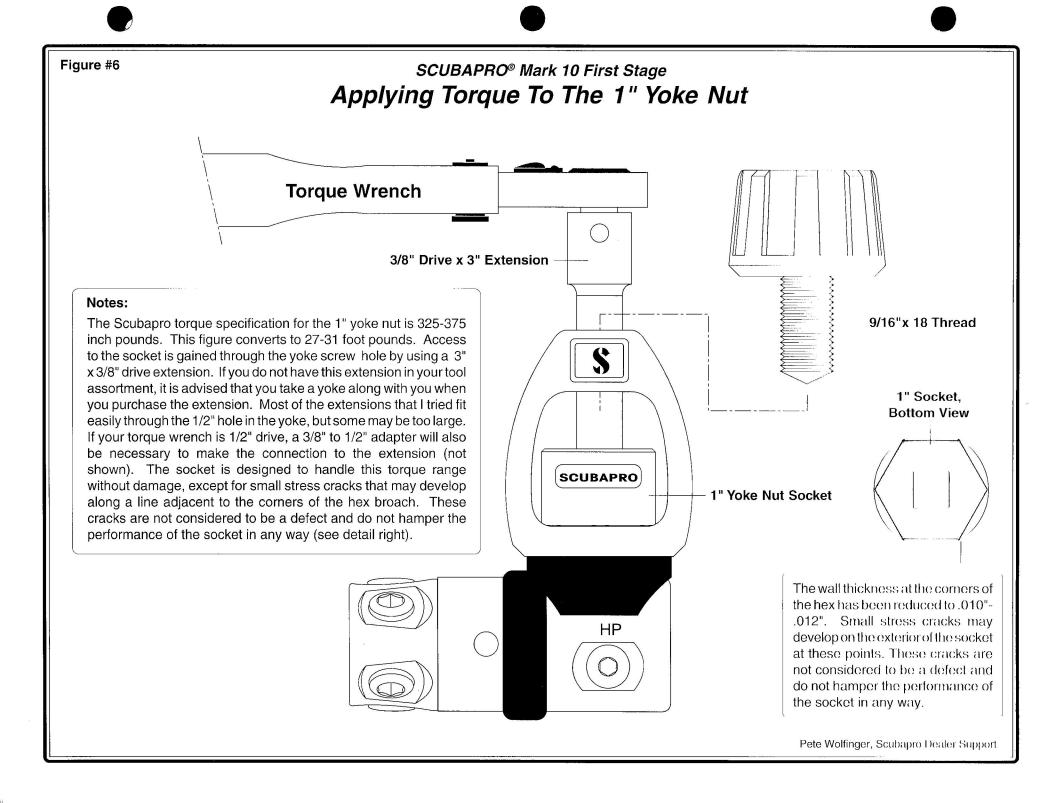

Notes:

the Scubapro Mk 10 first stage assembled in cutaway view. The yoke screw is not shown to conserve space. All dynamic o'rings are noted and should be replaced. The remainder of the o'rings are static and do not require replacement unless damaged.

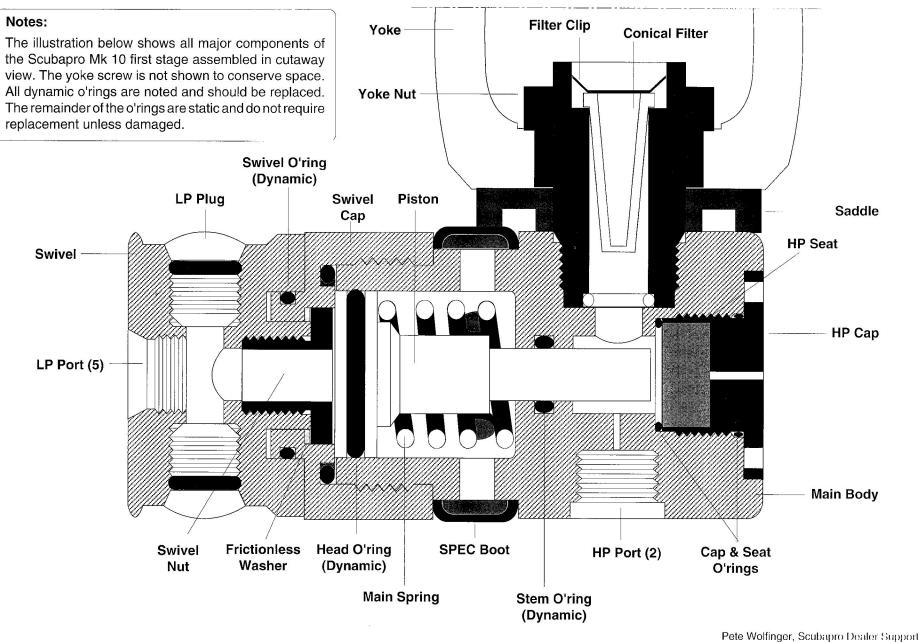


SCUBAPRO® Mark 10 First Stage Main Spring Shims & S.P.E.C.


Notes:

If the intermediate pressure is too low, up to three spring shims can be placed between the spring and the main body. Each shim will increase the IP approximately 5 psi. If the IP is not brought into range after adding up to three shims, the spring is soft and should be replaced. If the IP is too high, consult the Trouble Shooting Guide on the next page. Be sure to use a piston bullet when installing the piston in the main body. This will require that the HP cap be removed so that the bullet can be pulled out of the piston after it is in place (not shown).


Swivel & S.P.E.C. Cap Assembly




Piston Assembly



Main Spring





S.P.E.C. (Silicone Protected Environmental Cap)

S.P.E.C. kits are available as an accessory for all Scubapro first stages. The kit includes a special boot and a 7 gram tube of high viscosity silicone grease. S.P.E.C. should be added to any regulator the will be exposed to very cold water or water that is laden with high concentrations of sand or silt. The special grease is packed in the ambient chamber and retards ice build up and/or the exchange of contaminated water. The boot provides further protection and helps to retain the grease. The S.P.E.C. kit is supplied with complete instruction for installation. Important Note: The boot should never be used unless the ambient chamber is packed with silicone.



Shim Rotated 90° For Clarity

Pete Wollinger, Scubapro Dealer Support

SCUBAPRO® Mark 10 First Stage General Procedures & Trouble Shooting

General Procedures, All First Stages

- Precheck intermediate pressure before disassembly
- Precheck for any external air leaks before disassembly
- Disassemble using proper tools
- Inspect all parts for defects
- Degrease where necessary
- Clean all parts
- Replace all dynamic o'rings
- Replace the HP seat
- Replace the HP filter and filter retainer
- Reassemble all components
- Check intermediate pressure with new parts installed
- See Trouble Shooting Guide to analyze results

Mk 10 Schematic Notation:

Intermediate Pressure Limits

Intermediate pressure limits must be between 125-145 psig at both supply pressures of 3000 and 300 psig. 0 psig intermediate pressure creepage allowed after seating of a new seat. **Never exceed 160 psig IP.**

First stage mechanical principles are covered in Chapters 1-3 in the front of this manual. If you need additional information concerning this data, please refer to these three chapters or call Scubapro Technical Service Department or your regional representitive.

Symptom	Probable Cause	Solution
Symptom	Flobable Cause	Solution
Audible air leaks at porting	Loose plugs or hoses	Tighten where necessary
	Damaged static o'rings	Relube & replace o'rings
	O'ring not properly seated	Adjust o'ring alignment
Air leaks through ambient ports	Defective piston stem o'ring	Relube & replace o'ring
	Defective piston head o'ring	Relube & replace o'ring
• Low IP@ 3000 psi	Weak main spring	Replace or shim main spring
• High IP@ 3000 psi	Poor seating result	Replace HP seat
		Replace piston or main housing
	Stiff main spring	Replace spring or remove shims
	HP stem o'ring pinch	Check IP @ 300 psi
• Low IP @ 300 psi	Weak spring	Replace or shim spring
• High IP @ 300 psi	Stiff spring	Replace spring or remove shims
Initial IP creep on gauge	New seat taking a set	Cycle regulator 20-25 times
Continuous IP creep on gauge	Poor seating result	Replace HP seat
		Replace piston or body
• High IP @ 3000,	HP stem o'ring pinch	Replace & relube stem o'ring
Norm. IP @300		Replace piston
(balanced piston only)		Replace body
(Tiopiado body

Pete Wolfinger, Scubapro Dealer Support