

# EXPERIMENTAL INVESTIGATION OF HEAT TRANSFER AND PRESSURE DROP AUGMENTATION FOR LAMINAR FLOW IN SPIRALLY ENHANCED TUBES

Sara Rainieri, Angelo Farina e Giorgio Pagliarini  
Università di Parma, Dipartimento di Ingegneria Industriale  
V.le delle Scienze, 43100 Parma

## ABSTRACT

The effect of the internal helical ridging on the heat transfer coefficient and friction factor is experimentally investigated for laminar internal flow of a Newtonian fluid in the case of uniform wall heat flux. Five different geometries are considered. The results are compared with previous investigations and with the predictions for the smooth tube in order to point out the heat transfer enhancement and the friction factor increase in the laminar flow field.

## 1. INTRODUCTION

The introduction of roughened surfaces obtained with internal helical ridging or transverse ribbing, has revealed a successful method in enhancing heat transfer in tubes and, therefore, in reducing the heat exchanger size. Although most prior studies have focused on the turbulent flow, the laminar range is of particular interest in a wide variety of engineering situations, also including heat exchangers for viscous liquids in chemical process and food industry. When the flow is laminar because of small dimensions, low flow rates, or highly viscous fluids, like the ones processed in food industry, the use of smooth tubes gives poor performances and new configurations are needed to enhance the rate of heat transfer and, therefore, to reduce heat exchanger size and cost. The helical corrugation has revealed a type of roughness very suitable for dairy products, since fouling may be caused by deeper troughs. Tubes having a transverse repeated-rib roughness with rectangular cross section have been analysed first by Webb et al. [1]. By using the law of the “wall similarity” and heat-momentum analogy he proposed some correlations where the friction factor is expressed as a function of the dimensionless geometric parameters and the Reynolds number, while the Stanton number is described as a function of the same variables and the Prandtl number as well. Gee and Webb [2] extended this study to the effect of the rib helix angle. Withers [3], [4] developed correlating equations, based on the heat-momentum transfer analogy, for the heat transfer and pressure drop in tubes having simple and multiple helical internal ridging. These correlations were derived

number range 10000 – 120000 and Prandtl number range 4 – 10. Heat transfer enhancement of up to 2.5 to 3 were reported. Heat transfer augmentation in a spirally fluted tube was investigated by Yampolski [5]. He showed that the swirl in the flow due to the helical flutes enhances turbulent exchange on both the inside and the outside of the tube without causing a considerable increase in the friction factor. Other experimental data on pressure drop and heat transfer coefficient for turbulent flow inside doubly-fluted tubes were obtained by Richards et al [6]. Twelve different geometries have been analysed and the outcome shows that only some of them yield an improved performance, expressed by the Authors in terms of heat exchanger volume reduction. Garimella et al. [7] expressed the performance of spirally enhanced tubes in terms of a single non dimensional geometric parameter, the severity. Again turbulent flow is considered and it is shown that for severity values between 0.001 and 0.01 the heat transfer augmentation is accompanied by relatively low friction factor increase, thus confirming the efficiency of this kind of geometries. Garimella and Christensen [8] have investigated the fluid flow in annuli formed by placing spirally fluted, indented and ribbed tubes inside a smooth outer tube. Detailed temperature profile measurements and flow visualisation tests were performed for the laminar, transitional and turbulent flow in order to better understand the development of the swirl in the bulk flow. It was found that the fluted inner tubes are the most efficient in promoting the secondary flow and hence in enhancing the convective heat transfer. The same Authors [9], [10] suggested also correlating equations for the friction factor and the Nusselt number for the laminar,

The laminar flow has also been considered by Rowley and Patankar [11]. They obtained numerical results for pressure drop and heat transfer in circular tubes with circumferential internal fins with the boundary condition of linearly varying wall temperature. Despite the increased area provided by the fins, they showed that the presence of this kind of roughness often decreases the heat transfer coefficient rather than augmenting it. The recirculation of the fluid induced by the fins enhances the heat transfer only for Prandtl number greater than 5. A numerical technique for predicting the friction factor and the heat transfer in spirally fluted tubes has been proposed by Srinivasan et al. [12]. According to this method the flute region is modelled as a porous substrate, with direction dependent permeability, that affects the flow field in much the same manner as the spiral flutes. The Nusselt number values obtained with the numerical simulation are in good agreement with their experimental data for Reynolds number below 500. Preliminary tests [13] confirmed that the presence of the helical ridging yields a significant heat transfer augmentation also in the laminar field and suggested the opportunity of further investigation.

## 2. TUBE GEOMETRY

All the tubes tested fall into the general category usually referred to as spirally enhanced tubes. They are characterised by an internal helical ridging corresponding to an external helical grooving, obtained by embossing a smooth tube made of stainless steel. Three of the five geometries tested in the present study show a single helix ridging and they have been obtained from a tube having an external diameter of 16 mm and a wall thickness of 1 mm. The others have two helical ridging that spiral along the tube in opposite direction and they have been obtained from a tube having an external diameter of 18 mm and a wall thickness of 1 mm. The tubes are shown in figure 1. Tubes 3 and 4 show a very irregular wall profile; in particular the two helix do not cross along the same generatrix of the cylindrical envelope surface. This is due to the particular manufacturing technique used which provide a double process to create consecutively the two helical corrugations.

The geometric parameters usually used to describe spirally enhanced tubes are: the bore diameter  $D_b$ , the envelope diameter  $D_{env}$ , the ridge depth  $e$ , the pitch  $p$  and the number of starts  $N$ , (see for instance [7]). A relevant non dimensional parameter introduced by Withers and Habdas [14] for this kind of geometries is the severity, defined as follows:  $s = \frac{e^2}{pD_n}$ , where  $D_n$  is the nominal

tube diameter. The generic section of a cross-helix tube is shown in figure 2. The local heat transfer coefficient, and therefore the local Nusselt number, have been obtained by considering a heat transfer surface equal to the surface of a cylinder having a diameter  $D_{env}$ .  $D_{env}$  has also been used as the characteristic length of the problem, in accordance with other investigators [3],[6]. Richards et al. [6] used both the bore diameter and the envelope diameter to reduce their experimental data, and they drew opposite

Srinivasan et al. [12] used instead the volume based diameter as the characteristic length for both the experimental and the numerical analysis. The envelope diameter can in practice be easily determined, while on the contrary the other dimensions, like the bore diameter, the nominal diameter  $D_n$ , or the volume based diameter result more difficult to be measured, as already pointed out by Richards et al. [6]. Table 1 shows the geometric data for the tubes discussed in the present study. The geometric variables mentioned above are often not exhaustive to describe the various geometries since different manufacturing techniques are currently in use to produce them. For example tube 2 and 5 show the same values of ridge depth, pitch and diameter, and hence of severity, but the profile of the corrugation is different (see figure 1). The mechanical external pressure used to obtain the helical ridging has been applied in different ways, thus producing a sharper ridge in tube 5 than in tube 2.

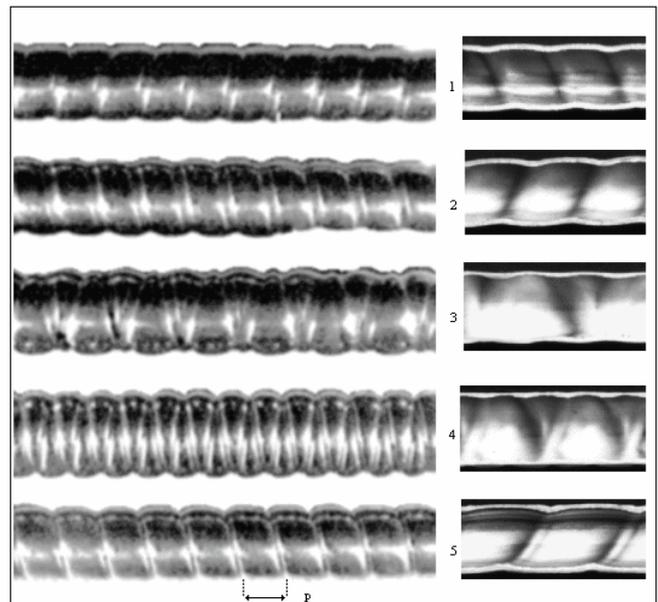


Figure 1: *Tubes tested.*

## 3. EXPERIMENTAL APPARATUS

The test section together with a schematic drawing of the flow loop are shown in figure 3. The prescribed condition of uniform heat flux has been obtained by Joulean dissipation in the tube wall. The heated section is 1.84 m long and it is preceded by an unheated development approach section of about 1 m. In the case of the smooth tube this allows the fluid to reach the complete hydrodynamic development before entering the heated section for flow rates corresponding approximately to Reynolds numbers of up to 1500. The whole length of the heat transfer section is thermally insulated to minimise the heat exchange to the environment. The wall temperature has been measured through 45 type T copper-constantan thermocouples, previously calibrated. They were attached circumferentially to the external surface of the tube, fixed with a layer of self bonding tape and electrically insulated from the tube

Table 1: *Geometric data for the tubes tested*

Tube number	Bore Diameter $D_n$ (mm)	Envelope Diameter $D_{env}$ (mm)	Groove Depth $e$ (mm)	Helix Pitch $p$ (mm)	Type of corrugation	Severity $s$
1	12	14	1	13	single-helix	0.006
2	11	14	1.5	13	single-helix	0.014
3	14	16	1	18	cross-helix	0.004
4	14	16	1	10	cross-helix	0.007
5	11	14	1.5	13	single-helix	0.014

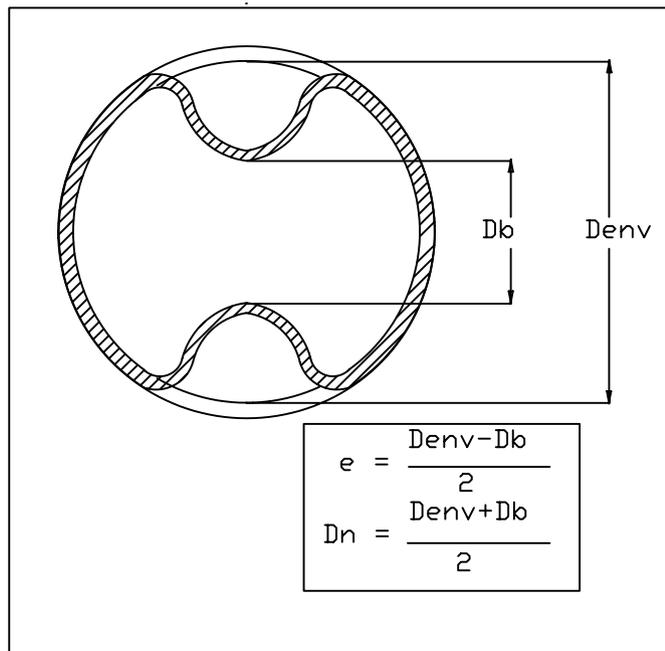


Figure 2: *Geometry of the cross-corrugated tube.*

sured by two thermocouple probes directly immersed in the fluid. The bulk temperature at any location in the heat transfer section has been calculated from the power supplied to the tube and heat losses through the insulation, whose thermal resistance had been measured in a previous calibration of the apparatus. The data acquisition software provided to update the data coming from all the channels and to plot them as a function of time on a screen. The program provided besides to hold the heat flux constant by varying the output of the power supply according to the effective resistive load of the tube wall. The power supplied to the test section was selected for the various flow rates to limit the difference between the inlet and outlet bulk temperature to about  $2.5^\circ\text{C}$ . In these conditions the effect of the variation of the fluid properties with temperature was assumed to be negligible. As working fluid a mixture containing approximately 50 per cent by weight of ethylene glycol in water has been used. The dynamic viscosity of this Newtonian fluid has been measured with a capillary-tube viscometer, type Ubbelohde. The Reynolds number range investigated is

ing the time needed to fill a volumetric flask placed at the outlet of the test section, while the magnetic flow-meter incorporated in the loop was simply used as a flow indicator. Pressure drop along the whole length of the tube was obtained by measuring the level reached by the fluid in two piezometric tubes in isothermal condition. Further details about the experimental apparatus and the data acquisition system can be found in [13].

## 4. RESULTS

### 4.1 Heat Transfer

Approximately 35 thermocouples probes have been distributed along the whole length of the heated section externally on the upper and lower crest of the corrugation. In order to measure also the local wall temperature variations, at some axial positions a thermocouple has been attached to the crest of the corrugation and other two probes have been placed in the preceding and in the following trough within a short distance. The internal wall temperature has been obtained by assuming a uniform heat generation in the tube wall and then calculating the temperature drop through the wall thickness. The temperature measured by the thermocouples placed in the external trough results lower than the one measured by the thermocouple placed in the adjacent external crest. In this region the local heat transfer coefficient results lower, probably due to some fluid stagnation. Figure 4 shows the mean temperature difference between the crest and the two adjacent troughs averaged along the heated section. Especially for tube 3, having a cross helical ridging and a long pitch, the local temperature variation becomes relevant in comparison to the bulk temperature difference between inlet and outlet (maximum value of about  $2.5^\circ\text{C}$ ). The fluid properties have been evaluated at the average bulk temperature, the arithmetic mean of the inlet and outlet fluid temperatures. Figures 5 and 6 show the local Nusselt number for tubes 1 and tube 3 versus the dimensional axial distance. The data show that for the lowest Reynolds numbers considered in both the tubes the local heat transfer coefficient approaches the value typical of a smooth tube; increasing the Reynolds number they show instead a considerable heat transfer enhancement. Tubes 2, 4, and 5 show a similar behaviour. Besides it can be observed that for high Reynolds number the local Nusselt number is almost constant along the heated section. This

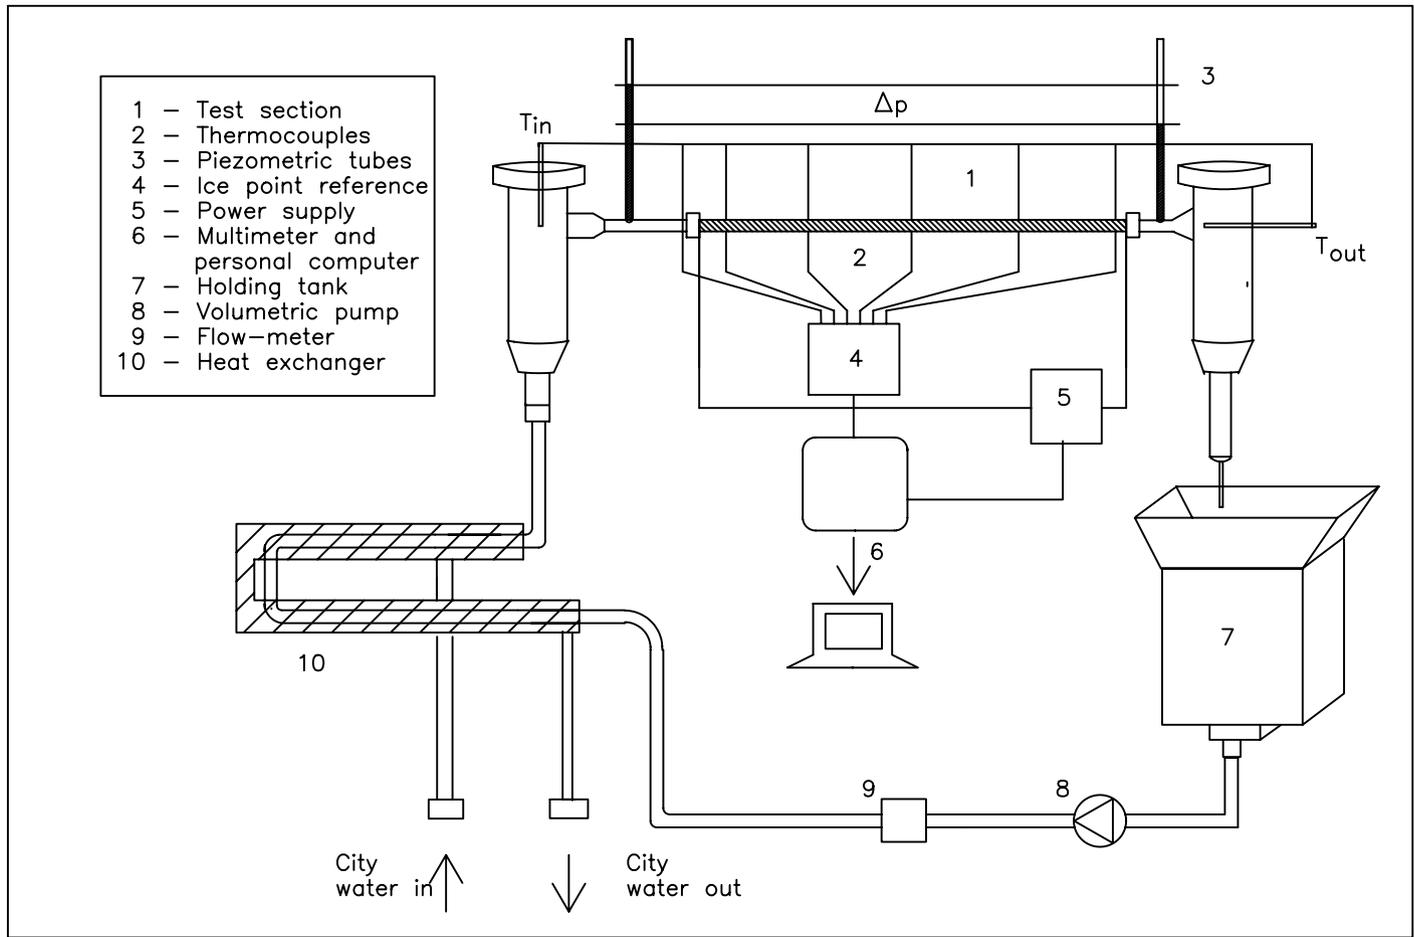


Figure 3: *Experimental apparatus.*

where the heating sets up the flow reaches a fully developed condition. The heat transfer augmentation in corrugated tubes is due to the distortion of the velocity and temperature fields. The presence of the repeated roughness elements causes in fact a disruption of the boundary layer and induces a secondary swirl flow, which both enhance the convective heat transfer. The Nusselt number enhancement shown by the results is in part also due to the fact that the heat transfer coefficient is based on the nominal area of a corresponding smooth tube having a diameter  $D_{env}$ , rather than the actual surface area of the corrugated tube. In this way higher heat flow rate at the wall, and therefore higher Nusselt numbers are predicted. The augmentation reported for the Nusselt number reflects then these combined effects. Figure 7 show the Nusselt number for the tubes tested averaged over the same dimensionless length versus the Reynolds number. Increasing the Reynolds number the data depart from the smooth tube prediction and approach a behaviour typical of the turbulent heat transfer. The transition occurs at different Reynolds number for the five tubes: for tubes 1, 2 and 5 having a single helical corrugation the transition value is between 700 and 800, while for tubes 3 and 4, having a cross-helical corrugation it is between 500 and 600. These data confirm what already pointed out by Garimella and Christensen [8],[9] for annuli with spirally fluted and indented inner tubes for which they

the range  $310 < Re < 730$  and  $525 < Re < 1675$ . The high Reynolds number behaviour has been compared with the correlation suggested by Richards et al. [6] which is of the form:

$$Nu = C_i Re^{\frac{4}{5}} Pr^{\frac{1}{3}} \quad (1)$$

where the constant  $C_i$  depends on the wall geometry. They tested doubly fluted tubes, different from the ones tested in the present research, at Reynolds number greater than 10000 with constant wall temperature boundary condition. However, as shown in figure 7, Eq. (1) with the two extreme value of the constant  $C_i$  reported by Richards et al. [6] includes the experimental data obtained in the present investigation already for Reynolds number greater than about 1200. The same working fluid was used in all the runs and therefore the Prandtl number has been held constant for the various data set reported in figure 7. Figure 8 shows the Nusselt number averaged along the heated section for all the tubes tested divided by the corresponding value for the smooth tube. We will refer to this quantity as the heat transfer enhancement.

$$\eta_H = \frac{\int_0^L Nu_{cx} dx}{\int_0^L Nu_{sx} dx} \quad (2)$$

ment of the tubes tested shows that tube 1 gives the poorest results, while tube 3 and 4, having a cross-corrugated surface, show the highest heat transfer enhancement. Garimella et al. [7] correlated heat transfer enhancement in spirally corrugated tubes by using a non-dimensional parameter, the severity. This non-dimensional parameter does not seem to be particularly significant for the data collected in the present study; in particular it does not well correlate the laminar heat transfer enhancement for the cross-corrugated tubes. In fact tube 1, having a single helix, and tube 4, having a double helix, have a similar value of severity, but they show a quite different value of the heat transfer enhancement.

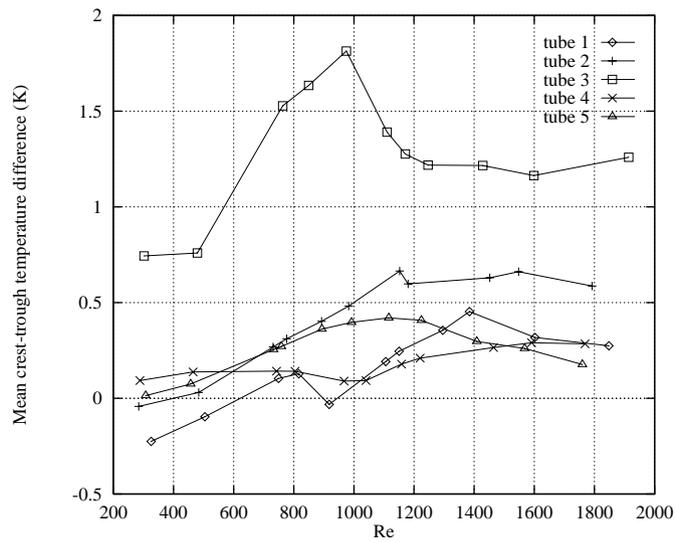


Figure 4: Mean crest-trough temperature difference averaged along the heated section for the tubes tested.

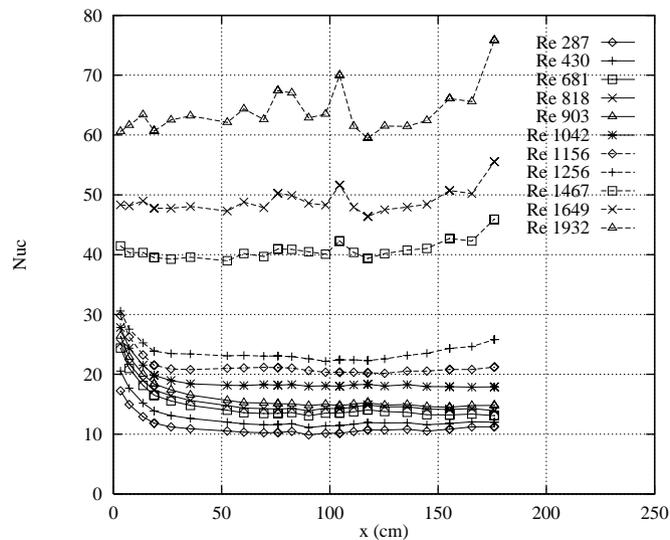


Figure 5: Local Nusselt number for tube 1 at various Reynolds numbers.

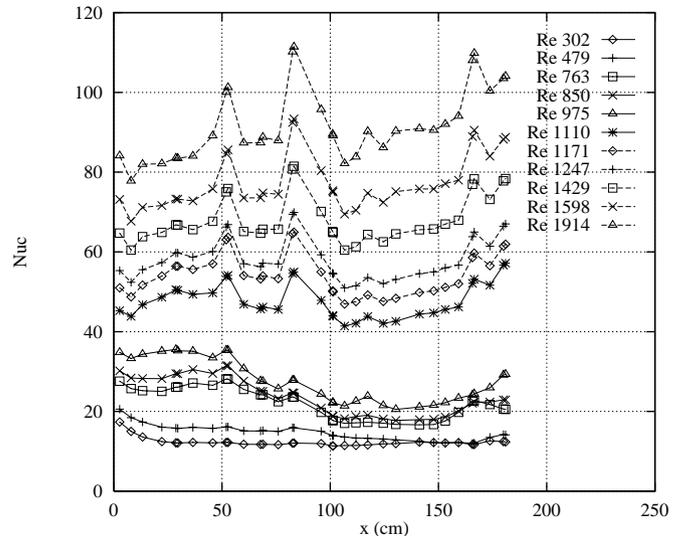


Figure 6: Local Nusselt number for tube 3 at various Reynolds numbers.

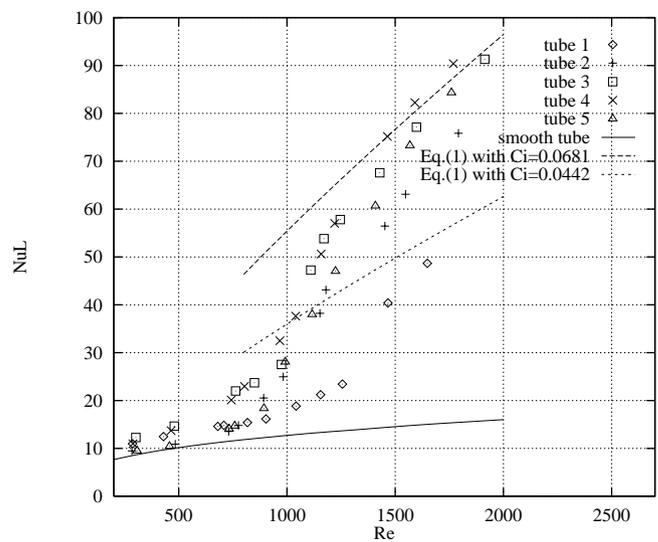


Figure 7: Mean Nusselt number for the tubes tested versus Reynolds number.

## 4.2 Pressure Drop

Pressure drops along the whole length of the tube were obtained by measuring the level reached by the fluid in two piezometric tubes. Richards et al. [6] suggested a correlation for the turbulent friction factor in doubly fluted tubes which is of the form:

$$f = BRe^{-n}. \quad (3)$$

The friction factor for the tubes having a single and a cross helical ridging together with both the theoretical and the experimental curves corresponding to the smooth tube are shown in figure 9. In the same figure also Eq. (3), corresponding to the same Richards et al. [6] tubes considered in figure 7 is shown. The experimental data for the friction factor are by far below Eq. (3) even in the Reynolds number range where the flow should approach

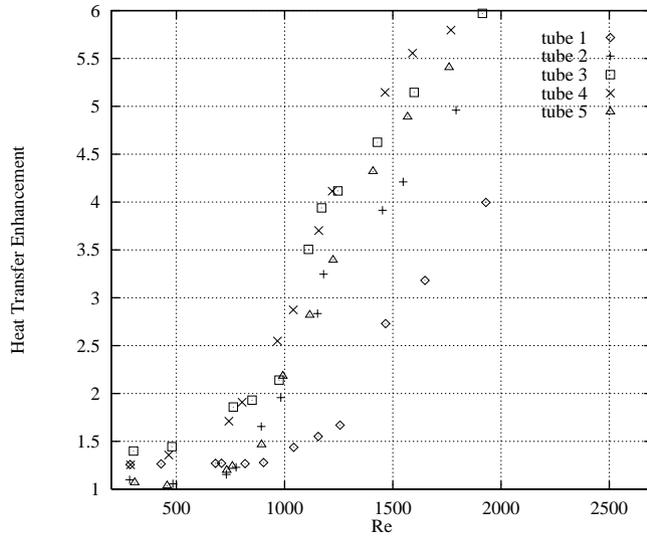


Figure 8: *Heat transfer enhancement.*

results. The friction factor increase  $\eta_f = f_c/f_s$  is shown in figure 10 for the various Reynolds number considered. The highest values of  $f$  correspond to tubes 4 and 5 which both have a deeply corrugated wall, (see figure 1). The experimental values seem in qualitative good agreement with the data obtained for the spirally fluted annuli by Garimella and Christensen [10] who reported friction factor increases between 1.1 and 2.0 for the laminar flow and up to 10 for the turbulent flow. The overall efficiency can be evaluated by examining the behaviour of the variable  $r = \eta_H/\eta_f$ , referred to as enhancement efficiency, see for instance [7]. Figure 11 shows the enhancement efficiency for the tubes tested. As already pointed out about figures 9 and 10, tubes 3 and 4 having the cross helical corrugation yield a significant heat transfer enhancement with a relatively low friction factor increase.

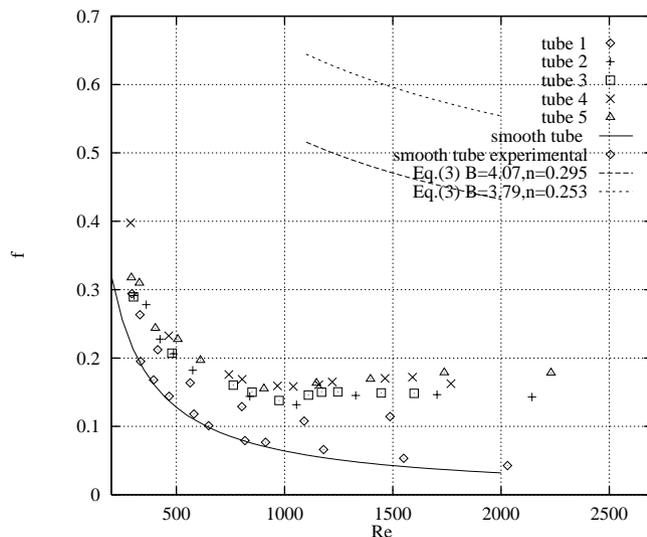


Figure 9: *Friction factor versus Reynolds number.*

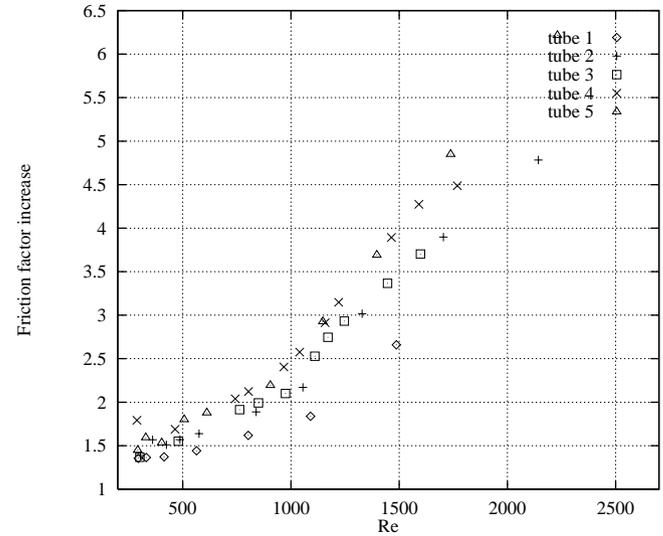


Figure 10: *Friction factor increase versus Reynolds number.*

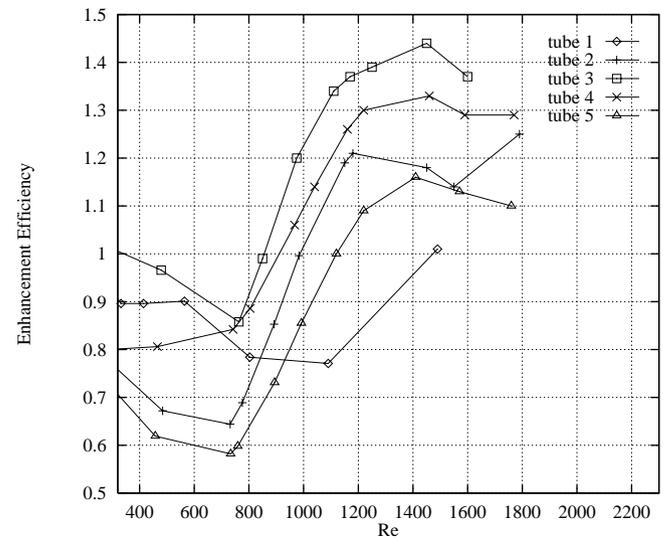


Figure 11: *Enhancement efficiency versus Reynolds number.*

## 5. CONCLUSION

Laminar flow forced convection to a Newtonian fluid in spirally enhanced tubes has been experimentally investigated. The experimental data show that in the spirally enhanced geometries the transition to the turbulent flow can occur at Reynolds number values much lower than 2000. This is in good agreement also with the results obtained for annuli formed with spirally fluted inner tubes [7,8,9]. This early transition is accompanied by a significant heat transfer enhancement which assumes values between 1.1 and 6 in the Reynolds number range 300-1800. Despite the limited number of geometry tested, it can be concluded that the cross-corrugated tubes exhibit the highest heat transfer increase over the smooth tube

## Acknowledgements

This research has been partly supported by Parmalat S.p.A.

## NOMENCLATURE

$D_{env}$	envelope diameter
$D_b$	bore diameter
$D_n$	nominal tube diameter = $\frac{D_{env}+D_b}{2}$
$e$	corrugation depth = $\frac{D_{env}-D_b}{2}$
$f$	mean friction factor = $\frac{2\Delta p D_{env}}{L\rho w^2}$
$L$	length of the heated section
$Nu$	local Nusselt number
$Nu_L$	mean Nusselt number
$p$	helix pitch
$r$	enhancement efficiency = $\frac{\eta_H}{\eta_f}$
$s$	severity
$Pr$	Prandtl number
$Re$	Reynolds number
$w$	mean flow velocity
$x$	axial distance
$\Delta p$	pressure drop
$\eta_H$	heat transfer enhancement
$\eta_f$	friction factor increase
$\rho$	fluid density

## Subscripts

$c$	corrugated tube
$s$	smooth tube

## REFERENCES

- [1] L. Webb, E. R. G. Eckert and R. J. Goldstein, "Heat Transfer and Friction in Tubes with Repeated-Rib Roughness", *Int. J. Heat and Mass Transfer* Vol.14, pp. 601-617, (1971)
- [2] D. L. Gee and R. L. Webb, "Forced Convection Heat Transfer in Helically Rib-Roughened Tubes", *Int. J. Heat and Mass Transfer*, Vol. 23, pp.1127-1136 (1980)
- [3] J. G. Withers, "Tube-Side Heat Transfer and Pressure Drop for Tubes Having Helical Internal Ridging with Turbulent/Transitional Flow of Single-Phase Fluid. Part1 Single - Helix Ridging", *Heat Transfer Engineering*, Vol. 2, No.1, pp. 48-58, july-sept. (1980)
- [4] J. G. Withers, "Tube-Side Heat Transfer and Pressure Drop for Tubes Having Helical Internal Ridging with Turbulent/Transitional Flow of Single- Phase Fluid. Part2. Multiple - Helix Ridging", *Heat Transfer Engineering*, Vol. 2, No. 2, pp. 43-50, oct.-dec. (1980)
- [5] J. S. Yampolsky, "Spirally Fluted Tubing for Enhanced Heat Transfer". *Heat exchangers - Theory*
- [6] D. E. Richards, M. M. Grant and R. N. Christensen, "Turbulent Flow and Heat Transfer Inside Doubly-Fluted Tubes", *ASHRAE Transactions*, Vol. 93, Part 2, pp. 2011-2026, (1987)
- [7] S. Garimella, V. Chandrachood, R. N. Christensen and D. E. Richards, "Investigation of Heat Transfer and Pressure Drop Augmentation for Turbulent Flow in Spirally Enhanced Tubes", *ASHRAE Transactions*, Vol. 94, Part 2, pp. 1119-1131, (1988)
- [8] S. Garimella and R. N. Christensen, "Experimental Investigation of Fluid Flow Mechanisms in Annuli with Spirally Fluted Inner Tube", *ASHRAE Transactions*, Vol. 99, Part 1, pp. 1205-1216,(1993)
- [9] S. Garimella and R. N. Christensen, "Heat Transfer and Pressure Drop Characteristics of Spirally Fluted Annuli: Part I- Hydrodynamics", *ASME Journal of Heat Transfer*, Vol. 117, pp. 54-60, (1995)
- [10] S. Garimella and R. N. Christensen, "Heat Transfer and Pressure Drop Characteristics of Spirally Fluted Annuli: Part II- Heat Transfer", *ASME Journal of Heat Transfer*, Vol. 117, pp. 61-68, (1995)
- [11] G. J. Rowley and S. V. Patankar, "Analysis of Laminar Flow and Heat Transfer in Tubes with Internal Circumferential Fins", *Int. J. Heat and Mass Transfer*, Vol. 27, pp. 553-560, (1984)
- [12] V. Srinivasan, K. Vafai and R. N. Christensen, "Analysis of Heat Transfer and Fluid Flow Through a Spirally Fluted Tube Using a Porous Substrate Approach", *Journal of Heat Transfer*, Vol. 116, pp. 543-551, (1994)
- [13] A. Farina and G. Pagliarini, "Un Apparato per l'Analisi Sperimentale dello Scambio Termico Convettivo in Condotti con Parete Corrugata", *Atti del XII Congresso Nazionale sulla Trasmissione del Calore*, pp. 151-162, L'Aquila, 23-24 giugno 1994
- [14] J. G. Withers and E. P. Habdas, "Heat Transfer Characteristics of Helical-Corrugated Tubes for In-Tube Boiling of Refrigerant R-12", *AIChE Symposium Series*, Vol. 74, No. 138, pp. 98-106, (1974)